

NEBRASKA TRACTOR TEST 1958

JOHN DEERE 5065M DIESEL

12 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—566 rpm)					
50.97 (38.01)	2200	3.49 (13.20)	0.481 (0.293)	14.62 (2.88)	
Standard Power Take-off Speed(540 rpm)					
52.83 (39.39)	2100	3.43 (12.99)	0.457 (0.278)	15.39 (3.03)	
Maximum Power (1 hour)					
56.90 (42.43)	1750	3.32 (12.55)	0.410 (0.249)	17.16 (3.38)	

VARYING POWER AND FUEL CONSUMPTION

50.97 (38.01)	2200	3.49 (13.20)	0.481 (0.293)	14.62 (2.88)	Air temperature
44.27 (33.01)	2247	3.15 (11.94)	0.501 (0.305)	14.04 (2.77)	76°F (24°C)
33.53 (25.00)	2269	2.51 (9.51)	0.527 (0.321)	13.34 (2.63)	Relative humidity
22.52 (16.79)	2286	1.92 (7.27)	0.600 (0.365)	11.72 (2.31)	22%
11.33 (8.45)	2300	1.42 (5.39)	0.884 (0.538)	7.96 (1.57)	Barometer
0.72 (0.53)	2300	0.89 (3.37)	8.749 (5.322)	0.80 (0.16)	28.87"Hg (97.77 kPa)

Maximum torque - 181 lb.-ft. (246 Nm) at 1600 rpm
 Maximum torque rise - 48.9%
 Torque rise at 1750 rpm - 40%
 Power increase at 1750 rpm - 11%

TRACTOR SOUND LEVEL WITHOUT CAB

	Front Wheel Drive Engaged dB(A)	Disengaged dB(A)
At no load in 5th(B2) gear	91.7	91.7
Transport in 12th(D3) gear		92.7
Bystander in 12th(D3) gear		83.2

TIRES AND WEIGHT

Rear tires—No., size, ply & psi (kPa)
Front tires—No., size, ply & psi (kPa)
Height of drawbar
Static weight with operator—Rear
 — Front
 — Total

Tested without ballast

Two 16.9-30;6;12 (85)
 Two 11.2-24;8;14 (95)
 15.5 in (395 mm)
 4455 lb (2021 kg)
 2570 lb (1165 kg)
 7025 lb (3186 kg)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

Dates of tests: October 8 - 13, 2009

Manufacturer: John Deere Commercial Products Inc., 700 Horizon South Parkway, Grovetown Ga. USA, 30813

FUEL, OIL and TIME: Fuel No. 2 Diesel Specific gravity converted to 60°/60°F (15°/15°C) 0.8450 Fuel weight 7.036 lbs/gal (0.843 kg/l) Oil SAE 15W40 API service classification CJ-4 Transmission and hydraulic lubricant John Deere Hy-Gard fluid Front axle lubricant SAE 80W90 API GL-5 Total time engine was operated 12.0 hours

ENGINE: Make John Deere Diesel **Type** five cylinder vertical with turbocharger and air to air intercooler **Serial No.** *PE5030R016511* **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 3.385" x 4.134" (86.0 mm x 105.0 mm) **Compression ratio** 18.2 to 1 **Displacement** 186 cu in (3050 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil **Fuel filter** one paper element **Muffler** underhood **Exhaust** vertical-downward **Cooling medium temperature control** one thermostat

ENGINE OPERATING PARAMETERS: Fuel rate: 24.6 - 27.1 lb/h (11.2 - 12.3 kg/h) **High idle:** 2275 - 2325 rpm **Turbo boost:** nominal 17.1 - 18.9 psi (118 - 130 kPa) as measured 18.0 psi (124 kPa)

CHASSIS: Type front wheel assist **Serial No.** *LV5065M140005* **Tread width** rear 61.5" (1563 mm) to 69.7" (1770 mm) front 52.8" (1342 mm) to 77.0" (1957 mm) **Wheelbase** 85.7" (2178 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.65 (2.65) second 2.05 (3.30) third 2.85 (4.59) fourth 3.81 (6.13) fifth 4.74 (7.63) sixth 5.99 (9.64) seventh 6.61 (10.63) eighth 7.45 (11.99) ninth 10.20 (16.41) tenth 10.38 (16.71) eleventh 12.69 (20.42) twelfth 17.68 (28.45) reverse 1.90 (3.05), 2.62 (4.21), 3.36 (5.41), 4.46 (7.17) **Clutch** wet disc hydraulically actuated by foot pedal **Brakes** wet disc hydraulically actuated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2100 engine rpm Economy PTO 540 rpm at 1645 engine rpm **Unladen tractor mass** 6850 lb (3107 kg)

HYDRAULIC PERFORMANCE

CATEGORY: II

Quick Attach: None

OECD Static test

Maximum force exerted through whole range: 3951 lbs (17.6kN) (50 mm cylinders)

4793 lbs (21.3kN) (56 mm cylinders)

i) Sustained pressure of the open relief valve: 2871 psi (198bar)

ii) Pump delivery rate at minimum pressure and rated engine speed: 16.2GPM (61.3 l/min)

iii) Pump delivery rate at maximum hydraulic power: 14.8GPM (56.0 l/min)

Delivery pressure: 2807 psi (194bar)

Power: 24.2HP (18.1kW)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 138°F (59°C).


We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 1958, December 14, 2009.

Roger M. Hoy
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers

HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	25.6	650
B	12.6	320
C	17.7	449
D	15.0	380
E	14.8	375
F	8.8	223
G	29.3	745
H	0.2	4
I	15.4	390
J	20.5	522
K	17.5	444
L	41.7	1060
M	23.0	585
N	33.1	840
O	7.8	197
P	47.5	1207
Q	33.9	861
R	28.1	715

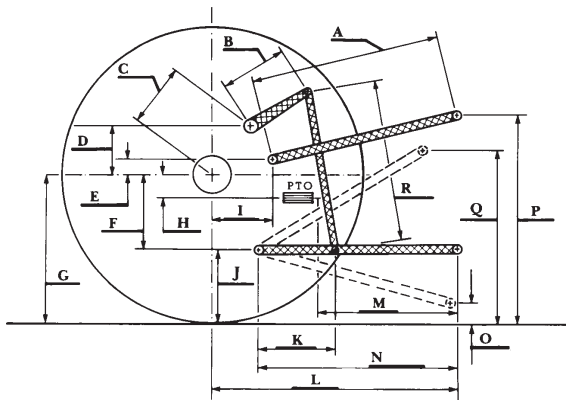

Economy mode
540 PTO rpm @ 1645 engine rpm

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)
52.99 (39.52)	1649	3.06 (11.60)	0.407 (0.248)	17.30 (3.41)
39.64 (29.56)	1643	2.28 (8.63)	0.405 (0.247)	17.36 (3.42)
26.43 (19.71)	1645	1.53 (5.79)	0.407 (0.248)	17.28 (3.40)
13.19 (9.83)	1642	0.93 (3.52)	0.499 (0.303)	14.11 (2.78)
0.61 (0.45)	1642	0.38 (1.44)	4.432 (2.698)	1.59 (0.31)

Normal mode
540 PTO rpm @ 2100 engine rpm

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)
53.14 (39.62)	2111	3.48 (13.17)	0.460 (0.280)	15.29 (3.01)
39.62 (29.55)	2098	2.64 (9.99)	0.469 (0.285)	15.00 (2.95)
26.40 (19.69)	2097	1.95 (7.38)	0.519 (0.316)	13.55 (2.67)
13.20 (9.84)	2098	1.31 (4.96)	0.698 (0.425)	10.09 (1.99)
0.65 (0.49)	2100	0.69 (2.61)	7.453 (4.534)	0.94 (0.19)



JOHN DEERE 5065M DIESEL