

# SUMMARY OF OECD TESTS 1897 and 1904—NEBRASKA SUMMARY 332

## NEW HOLLAND TN 75D DIESEL

## ALSO NEW HOLLAND TN 75S DIESEL

### 8 SPEED

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed (PTO speed 565 rpm)</b>					
63.9 (47.6)	2300	3.81 (14.42)	0.418 (0.254)	16.77 (3.30)	
<b>Standard Power Take-off speed (541 rpm)</b>					
63.7 (47.5)	2203	3.71 (14.05)	0.409 (0.249)	17.16 (3.38)	
<b>VARYING POWER AND FUEL CONSUMPTION</b>					
63.9 (47.6)	2300	3.81 (14.42)	0.418 (0.254)	16.77 (3.30)	Air temperature
56.5 (42.1)	2402	3.51 (13.29)	0.436 (0.265)	16.09 (3.17)	70°F (21°C)
42.8 (31.9)	2427	2.85 (10.80)	0.468 (0.284)	14.98 (2.95)	Relative humidity
28.6 (21.3)	2435	2.23 (8.43)	0.547 (0.333)	12.82 (2.53)	65%
14.6 (10.9)	2471	1.66 (6.27)	0.797 (0.485)	8.79 (1.73)	Barometer
--	2504	1.13 (4.26)	--	--	28.9" Hg (98.0 kPa)

Maximum Torque -202.2 lb.-ft. (274.1 Nm) at 1392 rpm  
 Maximum Torque Rise -38.6%  
 Torque rise at 1900 engine rpm -19%

#### DRAWBAR PERFORMANCE

#### BALLASTED - FRONT DRIVE ENGAGED FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp.°F (°C)		Barom. inch Hg (kPa)	
		75% of Pull at Maximum Power			Five Hours 4th (4S) Gear					
43.6 (32.5)	3300 (14.67)	4.95 (7.97)	2434	3.8	0.535 (0.326)	13.10 (2.58)	176 (80)	Air dry bulb	61 (16)	28.9 (97.8)
<b>MAXIMUM POWER IN SELECTED GEARS</b>										
2nd (2S) Gear										
36.6 (27.3)	6680 (29.72)	2.05 (3.30)	2438	15.0	0.602 (0.366)	11.63 (2.29)	179 (82)	59 (15)	29.0 (98.3)	
3rd (3S) Gear										
50.6 (37.7)	6570 (29.23)	2.89 (4.64)	2320	12.4	0.542 (0.330)	12.93 (2.55)	179 (82)	59 (15)	29.0 (98.3)	
4th (4S) Gear										
55.0 (41.0)	4365 (19.42)	4.72 (7.60)	2320	5.4	0.496 (0.302)	14.11 (2.78)	178 (81)	59 (15)	29.0 (98.3)	
5th (1F) Gear										
54.1 (40.4)	3620 (16.09)	5.61 (9.03)	2320	4.4	0.499 (0.304)	14.05 (2.77)	176 (80)	61 (16)	29.0 (98.3)	
6th (2F) Gear										
54.7 (40.8)	2340 (10.40)	8.77 (14.11)	2320	1.6	0.495 (0.301)	14.16 (2.79)	176 (80)	61 (16)	29.0 (98.3)	

**Location of Test:** Istituto Per La Meccanizzazione Agricola (IMA) Strada delle Cacce, 73-10135 Torino, Italy

**Dates of Test:** March - November, 1999

**Manufacturer:** New Holland Italia S.p.A., Viale delle Nazioni, 55-41100, Modena, Italy

**FUEL and OIL:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.842 Fuel weight 7.01 lbs/gal (0.840 kg/l) Oil SAE 15W40 API service classification SE/CD Oil consumption for 10 hours 0.02 lb (7.5 gm) Transmission and hydraulic lubricant SAE 80W90 GL-4 Front axle lubricant SAE 80W90 GL-4

**ENGINE:** Make New Holland Diesel Type three cylinder vertical with turbocharger Serial No. 229-4441542 Crankshaft lengthwise Rated Engine speed 2300 Bore and stroke 4.094" x 4.528" (104 mm x 115 mm) Compression ratio 18 to 1 Displacement 179 cu in (2930 ml) Starting system 12 volt Lubrication pressure Air cleaner two paper elements Oil filter one full flow cartridge Oil cooler engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil Fuel filter one paper element Muffler vertical Cooling medium temperature control thermostat

**CHASSIS:** Type 2WD and front wheel assist Serial No. 001157966 Tread width rear 48.1" (1222 mm) to 75.9" (1927 mm) front: 2WD - 53.1" (1349 mm) to 77.0" (1957 mm), FWA - 48.7" (1236 mm) to 76.3" (1939 mm) Wheel base 2WD - 83.9" (2130 mm) FWA - 81.3" (2065 mm) Hydraulic control system direct engine drive Transmission selective gear fixed ratio Nominal travel speeds mph (km/h) first 1.47 (2.37) second 2.19 (3.53) third 3.23 (5.19) fourth 4.78 (7.69) fifth 5.77 (9.28) sixth 8.59 (13.83) seventh 12.63 (20.33) eighth 18.72 (30.12) reverse 1.42 (2.29), 2.13 (3.42), 3.13 (5.03), 4.63 (7.45), 5.59 (8.99), 8.33 (13.40), 12.24 (19.69), 18.12 (29.17) Clutch dual dry disc operated by foot pedal Brakes wet disc hydraulically operated by two foot pedals which can be locked together Steering hydrostatic Power take-off 540 rpm at 2198 engine rpm or 1000 rpm at 2144 engine rpm Unladen tractor mass 2WD - 5645 lb (2560 kg), FWA - 6460 lb (2930 kg)

## DRAWBAR PERFORMANCE

### BALLASTED - 2WD

#### FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp. °F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)	
<b>75% of Pull at Maximum Power Five Hours 4th (4S) Gear</b>									
41.8 (31.2)	3230 (14.37)	4.85 (7.81)	2434	6.0	0.566 (0.344)	12.39 (2.44)	178 (81)	68 (20)	29.1 (98.4)
<b>MAXIMUM POWER IN SELECTED GEARS</b>									
3rd (3S) Gear									
45.5 (33.9)	5775 (25.70)	2.95 (4.75)	2426	15.0	0.559 (0.340)	12.54 (2.47)	178 (81)	70 (21)	29.3 (99.2)
4th (4S) Gear									
51.7 (38.6)	4300 (19.13)	4.51 (7.26)	2320	8.3	0.525 (0.319)	13.35 (2.63)	178 (81)	70 (21)	29.3 (99.2)
5th (1F) Gear									
53.5 (39.9)	3640 (16.19)	5.52 (8.88)	2320	6.8	0.511 (0.311)	13.71 (2.70)	179 (82)	68 (20)	29.3 (99.2)
6th (2F) Gear									
52.1 (38.9)	2325 (10.35)	8.40 (13.52)	2300	4.6	0.517 (0.315)	13.55 (2.67)	178 (81)	68 (20)	29.3 (99.2)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD test procedures. The performance results on this summary were taken from OECD tests conducted under the Code I Test procedure.

We, the undersigned, certify that this is a true summary of data from OECD Reports No. **1897** and **1904**, Nebraska Summary 332, December 13, 2000.

Brent T. Sampson  
Test Engineer

L.L. Bashford  
M.F. Kocher  
R.D. Grisso, Jr.  
Board of Tractor Test Engineers

## TN 75D-2WD

<b>TIRES, BALLAST AND WEIGHT</b>	<b>With Ballast</b>	<b>Without Ballast</b>
<b>Rear Tires</b>	Two 16.9R30; **,23 (160)	Two 16.9R30; **,23 (160)
<b>Ballast</b>	None	None
	440 lb (200 kg)	None
<b>Front Tires</b>	Two 7.50-16; 8;54 (370)	Two 7.50-16; 8;54 (370)
<b>Ballast</b>	None	None
	660 lb (300 kg)	None
<b>Height of Drawbar</b>	27.4 in (695 mm)	27.6 in (700 mm)
<b>Static Weight with Operator</b>		
-Rear	4210 lb (1910 kg)	3815 lb (1730 kg)
-Front	2700 lb (1225 kg)	1995 lb (905 kg)
-Total	6910 lb (3135 kg)	5810 lb (2635 kg)

## TN 75D- FWA

<b>TIRES, BALLAST AND WEIGHT</b>	<b>With Ballast</b>	<b>Without Ballast</b>
<b>Rear Tires</b>	Two 480/70R30; **,23 (160)	Two 480/70R30; **,23 (160)
<b>Ballast</b>	None	None
	440 lb (200 kg)	None
<b>Front Tires</b>	Two 380/70R20; **,23 (160)	Two 380/70R20; **,23 (160)
<b>Ballast</b>	None	None
	660 lb (300 kg)	None
<b>Height of Drawbar</b>	18.1 in (460 mm)	18.3 in (465 mm)
<b>Static Weight with Operator</b>		
-Rear	4640 lb (2105 kg)	4245 lb (1925 kg)
-Front	3085 lb (1400 kg)	2380 lb (1080 kg)
-Total	7725 lb (3505 kg)	6625 lb (3005 kg)

TRACTOR SOUND LEVEL WITH CAB	FWA dB(A)	2WD dB(A)
At no load in 4th(4S) gear	79.5	79.5
Bystander in 8th(4F) gear	84.9	86.8

**CENTER OF GRAVITY - 2WD**

Horizontal distance forward from centerline of rear wheels	28.7 in (730 mm)
Vertical distance above roadway	33.1 in (840 mm)
Horizontal distance from center of rear wheel tread	0.4 in (10 mm) to the left

**CENTER OF GRAVITY - FWA**

Horizontal distance forward from centerline of rear wheels	29.3 in (745 mm)
Vertical distance above roadway	32.3 in (820 mm)
Horizontal distance from center of rear wheel tread	0.4 in (10 mm) to the left

**TURNING ON A CONCRETE SURFACE (2WD)**

Turning radius	with brake applied right 122" (3.10 m) left 124" (3.15 m)
	without brake right 142" (3.60 m) left 146" (3.70 m)
Turning space radius	with brake applied right 126" (3.20 m) left 128" (3.25 m)
	without brake right 140" (3.55 m) left 146" (3.70 m)

**TURNING ON A CONCRETE SURFACE (FWA)**

Turning radius	with brake applied right 140" (3.55 m) left 142" (3.60 m)
	without brake right 169" (4.30 m) left 171" (4.35 m)
Turning space radius	with brake applied right 146" (3.70 m) left 146" (3.70 m)
	without brake right 173" (4.40 m) left 175" (4.45 m)

**THREE POINT HITCH PERFORMANCE (OECD Static Test)**


CATEGORY: II

Quick Attach: None

Maximum Force Exerted Through Whole Range: 4045 lbs (18.0 kN) (at the frame)  
4405 lbs (19.6 kN) (at lower link ends)

- i) Opening pressure of relief valve: NA
- Sustained pressure with relief valve open: 3020 psi (208 bar)
- ii) Pump delivery rate at minimum pressure: 17.1 GPM (64.9 l/min)
- iii) Pump delivery rate at maximum hydraulic power: 14.5 GPM (55.0 l/min)
- Delivery pressure: 2410 psi (166 bar)
- Power: 20.4 HP (15.2 kW)

**HITCH DIMENSIONS AS TESTED NO LOAD**

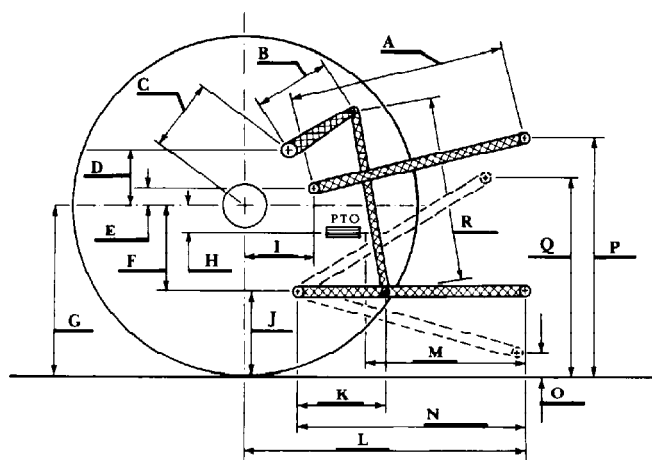

	inch	mm
A	26.6	675
B	10.0	255
C	12.3	312
D	10.9	276
E	12.1	308
F	7.4	189
G	27.3	695
H	1.2	30
I	13.4	340
J	19.9	506
K	20.6	523
L	40.7	1035
M	21.7	550
N	34.6	880
O	7.9	200
P	43.9	1116
Q	31.5	800
R	25.8	655