

# NEBRASKA OECD TRACTOR TEST 2207–SUMMARY 1156

## CHALLENGER MT743 DIESEL

### CONTINUOUSLY VARIABLE TRANSMISSION

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption		D.E.F. Consumption		Mean Atmospheric Conditions
		Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Gal/hr (l/h)	
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>						
<b>Rated Engine Speed—(PTO speed—1054rpm)</b>						
373.36 (278.41)	1701	20.14 (76.23)	0.377 (0.230)	18.54 (3.65)	1.03 (3.91)	
<b>Standard Power Take-off Speed (1000 rpm)</b>						
375.83 (280.26)	1614	19.99 (75.67)	0.372 (0.226)	18.80 (3.70)	1.08 (4.09)	
<b>Maximum Power (1 hour)</b>						
376.97 (281.11)	1601	20.01 (75.73)	0.371 (0.226)	18.84 (3.71)	1.10 (4.15)	

#### VARYING POWER AND FUEL CONSUMPTION

373.36 (278.41)	1701	20.14 (76.23)	0.377 (0.230)	18.54 (3.65)	1.03 (3.91)	Air temperature
321.18 (239.50)	1722	17.44 (66.01)	0.380 (0.231)	18.42 (3.63)	0.90 (3.39)	72°F (22°C)
243.30 (181.43)	1738	13.70 (51.84)	0.394 (0.240)	17.77 (3.50)	0.72 (2.71)	Relative humidity
163.34 (121.80)	1752	10.14 (38.38)	0.434 (0.264)	16.11 (3.17)	0.52 (1.98)	19%
82.22 (61.31)	1765	6.61 (25.01)	0.562 (0.342)	12.45 (2.45)	0.33 (1.24)	Barometer
2.73 (2.04)	1776	3.41 (12.89)	8.717 (5.302)	0.80 (0.16)	0.17 (0.66)	29.11" Hg (98.57 kPa)

Maximum torque - 1305 lb.-ft. (1770 Nm) at 1251 rpm  
 Maximum torque rise - 13.2%  
 Torque rise at 1360 engine rpm - 11.0%  
 Power increase at 1601 engine rpm - 1.0%

#### DRAWBAR PERFORMANCE

##### FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	D.E.F. Consumption Hp.hr/gal (kW.h/l)	Temp. °F(°C) cool- ing med bulb	Barom. inch Hg (kPa)
<b>Power at Rated Engine Speed—5.6 mph (9.0 km/h)</b>								
307.92 (229.62)	21029 (93.54)	5.49 (8.84)	1700	2.5	0.455 (0.277)	15.39 (3.03)	0.028 (0.017)	206 (97)
<b>75% of Pull at Rated Engine Speed—5.6 mph (9.0 km/h)</b>								
232.78 (173.58)	15716 (69.91)	5.56 (8.95)	1729	1.3	0.469 (0.285)	14.91 (2.94)	0.028 (0.017)	207 (97)
<b>50% of Pull at Rated Engine Speed—5.6 mph (9.0 km/h)</b>								
156.65 (116.81)	10484 (46.64)	5.61 (9.03)	1745	0.5	0.518 (0.315)	13.51 (2.66)	0.032 (0.019)	207 (97)
<b>75% of Pull at Reduced Engine Speed—7.5 mph (12.0 km/h)</b>								
232.94 (173.70)	15720 (69.93)	5.56 (8.95)	1251	1.3	0.430 (0.262)	16.26 (3.20)	0.048 (0.029)	207 (97)
<b>50% of Pull at Reduced Engine Speed—8.0 mph (13.0 km/h)</b>								
156.74 (116.88)	10487 (46.65)	5.61 (9.03)	1165	0.6	0.456 (0.277)	15.35 (3.02)	0.054 (0.033)	206 (97)

**Location of tests:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln, Nebraska 68583-0832

**Dates of tests:** October 15 to 24, 2018

**Manufacturer:** AGCO Corporation, 4205 River Green Parkway, Duluth Ga 30096

**CONSUMABLE Fluids, OIL and TIME: Fuel** No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8404 **Fuel weight** 6.998 lbs/gal (0.839 kg/l) **Diesel Exhaust Fluid (DEF)** 32% aqueous urea solution **DEF weight** 9.071 lbs/gal (1.087 kg/l) **Oil** SAE 15W-40 **API service classification** CJ-4 **Transmission and hydraulic lubricant** AGCO Permatran 821 XL fluid **Total time engine was operated:** 21.0 hours

**ENGINE: Make** AGCO **Power Diesel Type** seven cylinder vertical with two turbochargers, water to air intercooler, air to air intercooler and D.E.F. (diesel exhaust fluid) technology **Serial No.** \*E52440\* **Crankshaft** lengthwise **Rated engine speed** 1700 **Bore and stroke** 4.370" x 5.709" (111.0 mm x 145.0 mm) **Compression ratio** 16.7 to 1 **Displacement** 599 cu in (9822 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element and water separator **Fuel cooler** radiator for pump return fuel **Exhaust** DOC (diesel oxidation catalyst) and SCR (selective catalyst reduction) with a vertical muffler **Cooling medium temperature control** 2 thermostats and variable speed fan

**ENGINE OPERATING PARAMETERS: Fuel rate:** 135.1 - 148.8 lb/h (61.3 - 67.5 kg/h) **High idle:** 1765 - 1815 rpm **Turbo boost:** nominal 36.3 - 39.2 psi (250 - 270 kPa) as measured 37.7 psi (260 kPa)

**CHASSIS: Type** Tracklayer-rubber tracked **Serial No.** \*AGCC0743JJNND1045\* **Track width** 88.0" (2235 mm) to 119.5" (3035 mm) **Length of track on ground** 102.4" (2600 mm) **Hydraulic control system** direct engine drive **Transmission** CVT. Infinitely variable hydrostatic using variable displacement pump and motors **Nominal travel speeds mph (km/h)** forward - 0-25.0 mph (0-40 km/h), reverse - 0-8.7 mph (0-14 km/h) **Clutch** a foot pedal controls the hydrostatic oil flow **Brakes** wet multiple disc hydraulically actuated by foot pedal **Steering** electro-hydraulic differential steering controlled by steering wheel **Power take-off** 1000 rpm at 1614 or 1255 engine rpm **Unladen tractor mass** 36045 lb (16350 kg)

## DRAWBAR PERFORMANCE

### MANUAL MODE - 1700 ENGINE RPM DRAWBAR POWER AT SELECTED TRAVEL SPEED SETTINGS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F. Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
2.5 mph (4.0 km/h)										
207.20 (154.51)	36211 (161.07)	2.15 (3.46)	1730	14.4	0.526 (0.320)	13.30 (2.62)	0.033 (0.020)	208 (98)	46 (8)	28.86 (97.73)
3.1 mph (5.0 km/h)										
255.60 (190.60)	34406 (153.04)	2.79 (4.49)	1718	10.7	0.492 (0.299)	14.23 (2.80)	0.031 (0.019)	208 (98)	47 (8)	28.87 (97.77)
3.7 mph (6.0 km/h)										
292.62 (218.20)	31716 (141.08)	3.46 (5.57)	1701	7.8	0.475 (0.289)	14.74 (2.90)	0.029 (0.018)	207 (97)	48 (9)	28.87 (97.77)
4.2 mph (6.8 km/h)										
301.27 (224.66)	27905 (124.13)	4.05 (6.52)	1700	5.1	0.465 (0.283)	15.06 (2.97)	0.028 (0.017)	207 (97)	51 (10)	28.88 (97.80)
4.7 mph (7.5 km/h)										
304.88 (227.35)	25369 (112.85)	4.51 (7.26)	1701	4.1	0.461 (0.280)	15.17 (2.99)	0.028 (0.017)	207 (97)	49 (9)	29.18 (98.81)
5.1 mph (8.2 km/h)										
306.53 (228.58)	23125 (102.87)	4.98 (8.01)	1700	3.2	0.457 (0.278)	15.31 (3.02)	0.028 (0.017)	206 (97)	51 (11)	29.18 (98.81)
5.6 mph (9.0 km/h)										
307.92 (229.62)	21029 (93.54)	5.49 (8.84)	1700	2.5	0.455 (0.277)	15.39 (3.03)	0.028 (0.017)	206 (97)	51 (11)	29.18 (98.81)
6.2 mph (10.0 km/h)										
309.68 (230.93)	18963 (84.35)	6.13 (9.87)	1700	2.0	0.452 (0.275)	15.47 (3.05)	0.028 (0.017)	208 (98)	59 (15)	29.18 (98.81)
6.8 mph (11.0 km/h)										
309.14 (230.53)	17093 (76.03)	6.79 (10.93)	1700	1.5	0.453 (0.276)	15.46 (3.05)	0.028 (0.017)	209 (98)	61 (16)	29.17 (98.78)
7.5 mph (12.0 km/h)										
308.66 (230.17)	15606 (69.42)	7.42 (11.94)	1700	1.2	0.454 (0.276)	15.42 (3.04)	0.028 (0.017)	206 (97)	62 (17)	29.17 (98.78)
8.1 mph (13.0 km/h)										
307.71 (229.46)	14354 (63.85)	8.04 (12.94)	1700	1.0	0.454 (0.276)	15.43 (3.04)	0.028 (0.017)	207 (97)	64 (18)	29.16 (98.75)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments.

**NOTE 1:** To facilitate drawbar testing the tractor was operated in manual cruise mode.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. The performance figures on this summary were taken from a test conducted under the OECD Code 2 test procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **2207**, Nebraska Summary 1156, December 18, 2018.

Roger M. Hoy  
Director

M.F. Kocher  
J.D. Luck  
P.J. Jasa  
Board of Tractor Test Engineers

#### TRACTOR SOUND LEVEL WITH CAB

	dB(A)
At no load at 4.6 mph (7.5 km/h) engine speed 1780 rpm	69.6
At no load at 4.6 mph (7.5 km/h) engine speed 1320 rpm	66.5
Bystander	84.2

Horizontal distance of drawbar hitch point behind rear wheel axis - 40.3" (1023 mm)

#### TRACKS AND WEIGHT

Track width	25.0 in (635 mm)
Height of Drawbar	20.5 in (520 mm)
Static Weight with operator	36220 lb (16429 kg)

#### Tested Without Ballast

**DRAWBAR PERFORMANCE**  
**MANUAL MODE - 1600 ENGINE RPM**  
**DRAWBAR POWER AT SELECTED TRAVEL SPEED SETTINGS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption		D.E.F. Consumption	Temp. °F(°C) cool- ing med		Barom. Air dry Hg inch (kPa)
					lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	lb/hp.hr (kg/kW.h)		bulb	
2.5 mph (4.0 km/h)										
207.97 (155.08)	36252 (161.25)	2.16 (3.47)	1730	14.1	0.526 (0.320)	13.31 (2.62)	0.033 (0.020)	208 (98)	44 (7)	28.86 (97.71)
3.1 mph (5.0 km/h)										
255.69 (190.66)	34415 (153.08)	2.79 (4.49)	1718	10.7	0.493 (0.300)	14.20 (2.80)	0.031 (0.019)	207 (97)	48 (9)	28.87 (97.77)
3.7 mph (6.0 km/h)										
292.83 (218.36)	32239 (143.41)	3.41 (5.49)	1660	8.2	0.475 (0.289)	14.73 (2.90)	0.031 (0.019)	208 (98)	49 (10)	28.88 (97.80)
4.2 mph (6.8 km/h)										
303.09 (226.01)	28940 (128.73)	3.93 (6.32)	1599	5.7	0.459 (0.279)	15.23 (3.00)	0.029 (0.018)	206 (97)	51 (11)	28.88 (97.80)
4.7 mph (7.5 km/h)										
308.39 (229.97)	25909 (115.25)	4.47 (7.19)	1600	4.3	0.452 (0.275)	15.48 (3.05)	0.030 (0.018)	207 (97)	51 (11)	29.18 (98.81)
5.1 mph (8.2 km/h)										
310.27 (231.37)	23696 (105.41)	4.91 (7.90)	1600	3.4	0.449 (0.273)	15.60 (3.07)	0.029 (0.018)	206 (97)	51 (11)	29.18 (98.81)
5.6 mph (9.0 km/h)										
312.67 (233.16)	21557 (95.89)	5.44 (8.75)	1600	2.7	0.444 (0.270)	15.76 (3.10)	0.029 (0.018)	204 (96)	51 (11)	29.18 (98.81)
6.2 mph (10.0 km/h)										
312.32 (232.90)	19274 (85.73)	6.08 (9.78)	1599	2.1	0.444 (0.270)	15.75 (3.10)	0.030 (0.018)	209 (98)	61 (16)	29.18 (98.81)
6.8 mph (11.0 km/h)										
313.14 (233.51)	17473 (77.72)	6.72 (10.81)	1599	1.5	0.444 (0.270)	15.78 (3.11)	0.030 (0.018)	207 (97)	61 (16)	29.17 (98.78)
7.5 mph (12.0 km/h)										
312.19 (232.80)	15919 (70.81)	7.36 (11.84)	1600	1.2	0.444 (0.270)	15.75 (3.10)	0.029 (0.018)	208 (98)	62 (17)	29.17 (98.78)
8.1 mph (13.0 km/h)										
311.57 (232.34)	14589 (64.90)	8.01 (12.89)	1602	1.0	0.446 (0.271)	15.68 (3.09)	0.029 (0.018)	207 (97)	64 (18)	29.16 (98.75)

## Shiftable PTO Performance

### Economy mode

#### 1000 PTO rpm @ 1255 engine rpm

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption		D.E.F. Consumption	
		Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Gal/hr (l/h)
314.67 (234.65)	1255	16.26 (61.54)	0.362 (0.220)	19.36 (3.81)	1.55 (5.88)
235.33 (175.48)	1253	12.37 (46.83)	0.368 (0.224)	19.02 (3.75)	0.97 (3.66)
157.43 (117.39)	1255	8.75 (33.13)	0.389 (0.237)	17.99 (3.54)	0.62 (2.35)
78.74 (58.72)	1256	5.17 (19.58)	0.460 (0.280)	15.22 (3.00)	0.24 (0.90)
2.15 (1.60)	1259	2.00 (7.56)	6.509 (3.959)	1.08 (0.21)	0.10 (0.38)

### Normal mode

#### 1000 PTO rpm @ 1614 engine rpm

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption		D.E.F. Consumption	
		Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Gal/hr (l/h)
314.73 (234.70)	1617	16.75 (63.42)	0.373 (0.227)	18.79 (3.70)	0.89 (3.39)
236.04 (176.02)	1617	12.96 (49.04)	0.384 (0.234)	18.22 (3.59)	0.70 (2.65)
157.41 (117.38)	1620	9.45 (35.77)	0.420 (0.256)	16.66 (3.28)	0.48 (1.80)
78.74 (58.72)	1614	5.98 (22.65)	0.532 (0.324)	13.16 (2.59)	0.26 (0.98)
2.03 (1.51)	1614	2.82 (10.69)	9.757 (5.935)	0.72 (0.14)	0.11 (0.41)

## HYDRAULIC PERFORMANCE

CATEGORY: III

Quick Attach: yes

OECD Static test

Maximum force exerted through whole range: 21134 lbs (94.0 kN)


	<b>Pump 1</b>	<b>Pump 2</b>
	3 outlet sets combined	
i) Sustained pressure at compensator cutoff:	2988 psi (206 bar)	2959 psi (204 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	59.8 GPM (226.4 l/min)	60.3 GPM (228.4 l/min)
Combined flow:	120.1 GPM (454.8 l/min)	
iii) Pump delivery rate at maximum hydraulic power:	58.5 GPM (221.4 l/min)	59.0 GPM (223.5 l/min)
Delivery pressure:	2777 psi (191 bar)	2691 psi (186 bar)
Power:	94.8 HP (70.7 kW)	92.7 HP (69.1 kW)

	single outlet set	
i) Sustained pressure at compensator cutoff:	2993 psi (206 bar)	2960 psi (204 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	37.5 GPM (141.9 l/min)	37.4 GPM (141.5 l/min)
iii) Pump delivery rate at maximum hydraulic power:	36.1 GPM (136.8 l/min)	36.3 GPM (137.3 l/min)
Delivery pressure:	2531 psi (174 bar)	2420 psi (167 bar)
Power:	53.3 HP (39.8 kW)	51.2 HP (38.2 kW)

### HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	30.5	775
B	22.6	575
C	22.0	559
D	21.7	550
E	16.1	409
F	11.4	290
G	34.4	875
H	1.4	35
I	16.7	424
J	23.0	585
K	25.8	655
L	53.0	1347
*L'	59.2	1503
M	31.7	806
N	42.4	1076
O	9.0	230
P	50.0	1270
Q	43.5	1105
R	47.6	1210

\*L' to Quick Attach ends

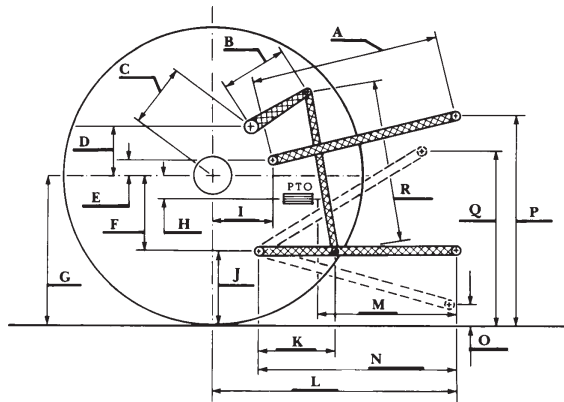

### RECOMMENDED CITATION FORMAT:

NTTL.(2018). Nebraska OECD Tractor test 2207 for Challenger MT743 Diesel. Lincoln, NE:Nebraska Tractor Test Laboratory. Retrieved from <http://tractortestlab.unl.edu>



**CHALLENGER MT743 DIESEL**  
Institute of Agriculture and Natural Resources  
University of Nebraska–Lincoln