

# NEBRASKA TRACTOR TEST 1755

## JOHN DEERE 5310 DIESEL

## ALSO JOHN DEERE 5320 DIESEL

### 9 SPEED

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed (PTO speed 545 rpm)</b>					
55.94 (41.72)	2400	3.44 (13.01)	0.435 (0.265)	16.28 (3.21)	
<b>Maximum power - (2 hours)</b>					
58.63 (43.72)	1900	3.20 (12.12)	0.387 (0.235)	18.32 (3.61)	

#### VARYING POWER AND FUEL CONSUMPTION

55.94 (41.72)	2400	3.44 (13.01)	0.435 (0.265)	16.28 (3.21)	Air temperature
49.31 (36.77)	2488	3.22 (12.19)	0.462 (0.281)	15.32 (3.02)	78°F (25°C)
37.36 (27.86)	2513	2.67 (10.10)	0.506 (0.308)	14.00 (2.76)	Relative humidity
25.22 (18.81)	2541	2.16 (8.18)	0.607 (0.369)	11.68 (2.30)	56%
12.72 (9.49)	2567	1.65 (6.25)	0.920 (0.560)	7.70 (1.52)	Barometer
0.29 (0.22)	2595	1.06 (4.01)	25.870 (15.730)	0.28 (0.06)	28.73"Hg (97.29kPa)

Maximum Torque 168 lb.-ft. (228 Nm) at 1798 rpm

Maximum Torque Rise - 37.3%

Torque rise at 1900 rpm - 32%

<b>TRACTOR SOUND LEVEL WITHOUT CAB (5310)</b>	<b>Front Wheel Drive</b>	
	<b>Engaged dB(A)</b>	<b>Disengaged dB(A)</b>
At no load in 5th(B2) gear	91.6	91.9
Bystander in 9th(C3) gear	--	79.9

<b>TRACTOR SOUND LEVEL WITH CAB (5320)</b>	<b>Front Wheel Drive</b>	
	<b>Engaged dB(A)</b>	<b>Disengaged dB(A)</b>
At no load in 7th(B3) gear	79.8	79.6
Bystander in 12th(C4) gear	--	82.7

#### TIRES AND WEIGHT

**Rear Tires** No., size, ply & psi (kPa)

**Front Tires** No., size, ply & psi (kPa)

**Height of Drawbar**

**Static Weight with operator** Rear  
Front  
Total

#### Tested Without Ballast

Two 16.9-30;6;12 (85)

Two 11.2-24;6;12 (85)

18.0 in (455 mm)

3205 lb (1454 kg)

2110 lb (957 kg)

5315 lb (2411 kg)

**Location of Test:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

**Dates of Test:** October 14-19, 1998.

**Sound test on John Deere 5320:** October 24, 2001

**Manufacturer:** John Deere Commercial Products Inc., 700 Horizon South Parkway, Grovetown Ga. USA, 30813

**FUEL, OIL and TIME:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8506 Fuel weight 7.082 lbs/gal (0.849 kg/l) Oil SAE 10W30 API service classification CE/CF-4 Transmission and hydraulic lubricant John Deere Hy-Gard Fluid Front axle lubricant SAE 80W90 API GL-5 Total time engine was operated 7.5 hours

**ENGINE: Make** John Deere Diesel **Type** three cylinder vertical with turbocharger **Serial No.** \*PE 3029T 009830\* **Crankshaft** lengthwise **Rated engine speed** 2400 **Bore and stroke** 4.19" x 4.33" (106.4 mm x 110.0 mm) **Compression ratio** 17.4 to 1 **Displacement** 179 cu in (2934 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** one paper element and one polyester felt element **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil **Fuel filter** one paper element and sediment bowl **Muffler** underhood **Exhaust** vertical **Cooling medium temperature control** one thermostat

**ENGINE OPERATING PARAMETERS: Fuel rate:** 23.9 - 26.5 lb/h (10.8 - 12.0 kg/h) **High idle:** 2550 - 2600 rpm **Turbo boost:** nominal 12.2 - 15.1 psi (84 - 104 kPa) as measured 13.6 psi (94 kPa)

**CHASSIS: Type** front wheel assist **Serial No.** \*LV5310S-132963\* **Tread width** rear 53.8" (1366 mm) to 69.7" (1770 mm) front 51.7" (1313 mm) to 75.9" (1927 mm) **Wheelbase** 80.7" (2050 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.32 (2.13) second 1.91 (3.07) third 2.60 (4.19) fourth 3.12 (5.02) fifth 4.50 (7.24) sixth 6.14 (9.88) seventh 8.56 (13.78) eighth 12.36 (19.89) ninth 16.86 (27.13) reverse 2.22 (3.57), 5.24 (8.43), 14.39 (23.16) **Clutch** single dry disc operated by foot pedal **Brakes** single wet disc hydraulically operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2376 engine rpm **Unladen tractor mass** 5150 lb (2336 kg)

# JOHN DEERE 5310 Diesel

## THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

Maximum Force Exerted Through Whole Range: 2905 lbs (12.9kN)

- i) Opening pressure of relief valve: NA
- Sustained pressure of the open relief valve: 2920 psi (201 bar)
- ii) Pump delivery rate at minimum pressure and rated engine speed: 12.7 GPM (48.1 l/min)
- iii) Pump delivery rate at maximum hydraulic power: 10.9 GPM (41.3 l/min)
- Delivery pressure: 2550 psi (176 bar)
- Power: 16.2 HP (12.1 kW)

## THREE POINT HITCH PERFORMANCE

Observed Maximum Pressure psi.(bar) 2830(195)  
 Location: hydraulic service port  
 Hydraulic oil temperature: °F(°C) 170(77)  
 Location: hydraulic sump  
 Category: II  
 Quick attach: none

### ASAE Static Test System pressure 2750 psi (190 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	4686	4713	4625	4178	3619
" " " " " (kN)	(20.8)	(21.0)	(20.6)	(18.6)	(16.1)

### SAE Static Test System pressure 2550 psi (176 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	4345	4370	4299	3874	3356
" " " " " (kN)	(19.3)	(19.4)	(19.1)	(17.2)	(14.9)

	SAE/ASAE Test		OECD Test	
	inch	mm	inch	mm
A	23.2	590	24.1	613
B	11.0	280	11.0	280
C	14.0	356	14.0	356
D	12.2	311	12.2	311
E	11.2	284	11.2	284
F	6.5	166	6.5	166
G	27.4	695	27.4	695
H	0.2	4	0.2	4
I	15.1	384	15.1	384
J	20.8	530	20.8	530
K	16.7	424	16.7	424
L	39.2	996	39.2	996
M	22.4	570	22.4	570
N	32.9	836	32.9	836
O	8.0	203	8.0	203
P	40.9	1040	44.9	1140
Q	34.0	864	34.0	864
R	20.8	527	20.8	527

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests, the fuel temperature at the injection pump was maintained at 132°F (55°C).


**Report reissued:** Supplemental permit for John Deere 5320 Diesel, December 2001.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 1755, December 6, 2001.

Brent T. Sampson  
 Test Engineer

L.L. Bashford  
 M.F. Kocher  
 V.I. Adamchuk  
 Board of Tractor Test Engineers

HITCH DIMENSIONS AS TESTED - NO LOAD

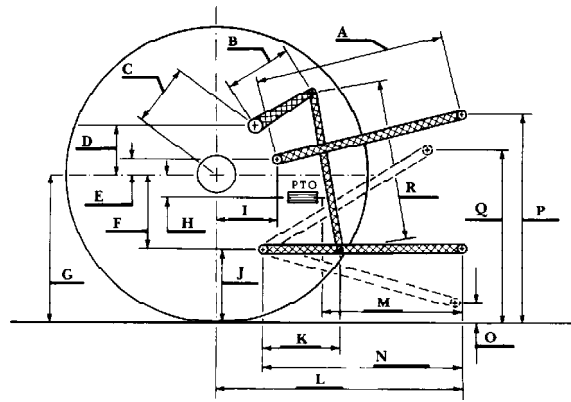

## JOHN DEERE 5320 DIESEL

### THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

Maximum Force Exerted Through Whole Range: 3213 lbs (14.3kN)

### THREE POINT HITCH PERFORMANCE

Observed Maximum Pressure psi.(bar)	2830(195)
Location:	remote outlet
Hydraulic oil temperature: °F(°C)	148(64)
Location:	pump inlet
Category:	II
Quick attach:	none

#### ASAE Static Test System pressure 2750 psi (190 Bar)

Hitch point distance to ground level in.(mm)	8.0(203)	15.0(381)	22.0(559)	29.0(737)	36.0(914)
Lift force on frame lb	5140	5288	5130	4655	3924
" " " " " " (kN)	(22.9)	(23.5)	(22.8)	(20.7)	(17.5)

#### SAE Static Test System pressure 2520 psi (174 Bar)

Hitch point distance to ground level in.(mm)	8.0(203)	15.0(381)	22.0(559)	29.0(737)	36.0(914)
Lift force on frame lb	4694	4829	4685	4266	3596
" " " " " " (kN)	(20.9)	(21.5)	(20.8)	(19.0)	(16.0)



**John Deere 5320 Diesel**