

# SUMMARY OF OECD TEST 2193-NEBRASKA SUMMARY 505

## CHALLENGER MT525B TECHSTAR DIESEL CONTINUOUSLY VARIABLE TRANSMISSION

### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed—(PTO speed—1081 rpm)</b>					
96.7 (72.1)	2199	6.64 (25.14)	0.473 (0.288)	14.57 (2.87)	
<b>Standard Power Take-off Speed(1000 rpm)</b>					
102.5 (76.4)	2034	6.52 (24.69)	0.439 (0.267)	15.71 (3.09)	
<b>Maximum Power (2 hours)</b>					
106.5 (79.4)	1800	6.33 (23.97)	0.411 (0.250)	16.81 (3.31)	

### VARYING POWER AND FUEL CONSUMPTION

96.7 (72.1)	2199	6.64 (25.14)	0.473 (0.288)	14.57 (2.87)	Air temperature
82.8 (61.8)	2217	5.98 (22.64)	0.498 (0.303)	13.86 (2.73)	66°F (19°C)
62.8 (46.8)	2239	4.95 (18.74)	0.544 (0.331)	12.69 (2.50)	Relative humidity
42.4 (31.6)	2260	4.12 (15.58)	0.671 (0.408)	10.29 (2.03)	28%
21.3 (15.9)	2278	3.02 (11.42)	0.976 (0.594)	7.07 (1.39)	Barometer
--	2297	2.19 (8.28)	--	--	28.9" Hg (98.0 kPa)

Maximum Torque - 340 lb.-ft. (461 Nm) at 1403 rpm  
 Maximum Torque Rise - 47.3%  
 Torque rise at 1800 engine rpm - 34%

### DRAWBAR PERFORMANCE (Unballasted - Front Drive Engaged) FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp. °F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
<b>Maximum Power—Turtle</b>									
81.8 (61.0)	7945 (35.35)	3.86 (6.21)	2201	2.5	0.572 (0.348)	12.06 (2.38)	149 (65)	70 (21)	29.9 (101.3)
<b>75% of Pull at Maximum Power—Turtle</b>									
62.8 (46.8)	5950 (26.46)	3.96 (6.37)	2229	1.6	0.625 (0.380)	11.03 (2.17)	144 (62)	70 (21)	29.9 (101.3)
<b>50% of Pull at Maximum Power—Turtle</b>									
42.8 (31.9)	3965 (17.64)	4.05 (6.51)	2250	0.7	0.746 (0.454)	9.24 (1.82)	144 (62)	72 (22)	29.9 (101.3)
<b>75% of Pull at Reduced Engine Speed—Turtle</b>									
63.1 (47.0)	5950 (26.46)	3.98 (6.40)	1872	1.8	0.540 (0.328)	12.77 (2.51)	144 (62)	70 (21)	29.9 (101.3)
<b>50% of Pull at Reduced Engine Speed—Turtle</b>									
42.8 (31.9)	3960 (17.62)	4.06 (6.53)	1887	0.7	0.625 (0.380)	11.02 (2.17)	140 (60)	70 (21)	29.9 (101.3)

**Location of tests:** DLG testing Station for Agricultural Machinery, Max-Eyth-Weg 1 D-64823 Gros-Umstadt, Germany

**Dates of tests:** January - March, 2004  
 Sound tests : January 19, 2006

**Manufacturer:** AGCO S.A., BP 60307, Avenue Blaise Pascal, 60026 Beauvais, France

**FUEL and OIL:** Fuel No. 2 Diesel **Specific gravity converted to 60°/60° F (15°/15°C)** 0.829  
**Fuel weight** 6.90 lbs/gal (0.8269 kg/l) **Oil SAE** 10W40 **API service classification** CH4  
**Transmission and hydraulic lubricant** SAE10W/40 **Front axle lubricant** Gear oil SAE 85W/90

**ENGINE: Make** Perkins Diesel **Type** six cylinder vertical with turbocharger and air to air intercooler  
**Serial No.** U092650K **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 3.937" x 5.00" (100.0 mm x 127.0 mm) **Compression ratio** 17.5 to 1 **Displacement** 365 cu in (5985 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and final drive oil, radiator for transmission oil **Fuel filter** one paper element **Muffler** vertical **Cooling medium temperature control** thermostat and variable speed fan

**CHASSIS: Type** front wheel assist **Serial No.** M309065 **Tread width** rear 61.6" (1566 mm) to 74.6" (1896 mm) front 72.4" (1840 mm) to 78.1" (1984 mm) **Wheelbase** 109.4" (2780 mm) **Hydraulic control system** direct engine drive **Transmission** AGCO CVT. A combination of mechanical and hydrostatic sections are electronically controlled to give the travel speeds shown. The transmission has two mechanical ranges. **Nominal travel speeds mph (km/h)** forward: Low range 0 - 17 (0 - 28), high range 0 - 31 (0 - 50) reverse: Low range 0 - 10 (0 - 16), high range 0 - 24 (0 - 38) **Clutch** a foot pedal controls the hydrostatic oil flow **Brakes** multiple wet disc hydraulically operated by two foot pedals that can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2062 engine rpm or 1000 rpm at 2033 engine rpm **Unladen tractor mass** 14835 lb (6730 kg)

**DRAWBAR PERFORMANCE**  
**(Unballasted - Front Drive Engaged)**

**MAXIMUM POWER AT SELECTED SPEEDS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
77.0 (57.4)	14310 (63.65)	2.02 (3.25)	2114	15.3	Turtle 0.610 (0.371)	11.29 (2.22)	147 (64)	66 (19)	30.0 (101.5)
86.2 (64.3)	14280 (63.53)	2.26 (3.64)	1801	9.1	Turtle 0.518 (0.315)	13.30 (2.62)	145 (63)	64 (18)	29.9 (101.4)
89.8 (67.0)	11090 (49.32)	3.04 (4.89)	1801	4.5	Turtle 0.494 (0.301)	13.95 (2.75)	145 (63)	64 (18)	29.9 (101.4)
89.4 (66.7)	8850 (39.36)	3.79 (6.10)	1800	2.7	Turtle 0.493 (0.300)	13.97 (2.75)	138 (59)	59 (15)	30.0 (101.5)
89.2 (66.5)	7250 (32.26)	4.61 (7.42)	1801	2.5	Turtle 0.497 (0.302)	13.86 (2.73)	138 (59)	61 (16)	30.0 (101.5)
88.4 (65.9)	5945 (26.45)	5.57 (8.97)	1800	1.8	Turtle 0.501 (0.305)	13.76 (2.71)	143 (62)	63 (17)	29.9 (101.4)
87.4 (65.2)	4985 (22.18)	6.57 (10.58)	1801	0.9	Turtle 0.505 (0.307)	13.65 (2.69)	145 (63)	63 (17)	29.9 (101.4)
86.1 (64.2)	4425 (19.68)	7.30 (11.74)	1803	0.6	Turtle 0.514 (0.313)	13.40 (2.64)	147 (64)	63 (17)	29.9 (101.4)
85.0 (63.4)	3775 (16.80)	8.44 (13.58)	1802	0.6	Turtle 0.522 (0.318)	13.20 (2.60)	147 (64)	61 (16)	29.9 (101.4)
87.9 (65.6)	7405 (32.90)	4.45 (7.16)	1801	2.2	Rabbit 0.503 (0.306)	13.71 (2.70)	149 (65)	63 (17)	29.9 (101.4)
88.6 (66.1)	6265 (27.88)	5.30 (8.53)	1801	1.6	Rabbit 0.499 (0.304)	13.81 (2.72)	147 (64)	64 (18)	29.9 (101.4)
88.6 (66.1)	5085 (22.62)	6.54 (10.52)	1802	1.1	Rabbit 0.499 (0.304)	13.81 (2.72)	147 (64)	64 (18)	29.9 (101.4)
88.5 (66.0)	4450 (19.79)	7.46 (12.01)	1805	0.8	Rabbit 0.501 (0.305)	13.73 (2.70)	147 (64)	64 (18)	29.9 (101.4)
87.4 (65.2)	3905 (17.37)	8.39 (13.51)	1807	0.5	Rabbit 0.510 (0.310)	13.50 (2.66)	149 (65)	63 (17)	29.9 (101.4)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments

**NOTE 1:** The data on this summary was obtained from OECD report 2193 conducted on the Massey Ferguson 7465 Diesel.

**NOTE 2:** The engine of the Challenger MT525B has two different injection pump characteristics. Power boosted - for travel speeds above 9.3 mph (15.0 km/h) or above 5.0 mph (8.0 km/h) with PTO engaged. Standard for all other conditions.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD test procedures. This tractor did not meet the manufacturer's 3 point lift capacity claim of 11200 lbs (5080 kg) at 24" behind link ends. The performance figures on this summary were taken from a test conducted under the OECD Code II test procedure.

We, the undersigned, certify that this is a true summary of data from OECD Report No. **2193**, Nebraska Summary 505, March 15, 2006.

Leonard L. Bashford  
Director

M.F. Kocher  
V.I. Adamchuk  
J.A. Smith  
Board of Tractor Test Engineers

**TRACTOR SOUND LEVEL WITH CAB**

	<b>dB(A)</b>
At no load in Turtle range - 4.6 mph (7.5 km/h)	70.4
Bystander in Rabbit range	84.4

**TIRES AND WEIGHT**

**Rear Tires** - No., size, ply & psi (kPa)  
**Front Tires** - No., size, ply & psi (kPa)  
**Height of Drawbar**  
**Static Weight with operator** - Rear  
- Front  
- Total

**Tested Without Ballast**

Two 650/65R38; \*\*, 12(80)  
Two 540/65R28; \*\*, 12(80)  
22.0 in (560 mm)  
9170 lb (4160 kg)  
5830 lb (2645 kg)  
15000 lb (6805 kg)

## THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

Maximum force exerted through whole range: 10915 lbs (48.55 kN)

i) Opening pressure of relief valve: NA

Sustained pressure of the open relief valve: 2915 psi (201 bar)

one coupler set      two outlet sets combined


ii) Pump delivery rate at minimum pressure: 27.6 GPM (104.3 l/min) 31.7 GPM (119.9 l/min)

iii) Pump delivery rate at maximum

hydraulic power: 26.9 GPM (101.8 l/min) 28.0 GPM (106.1 l/min)

Delivery pressure: 2310 psi (159 bar) 2685 psi (185 bar)

Power: 36.2 HP (27.0 kW) 43.8 HP (32.6 kW)

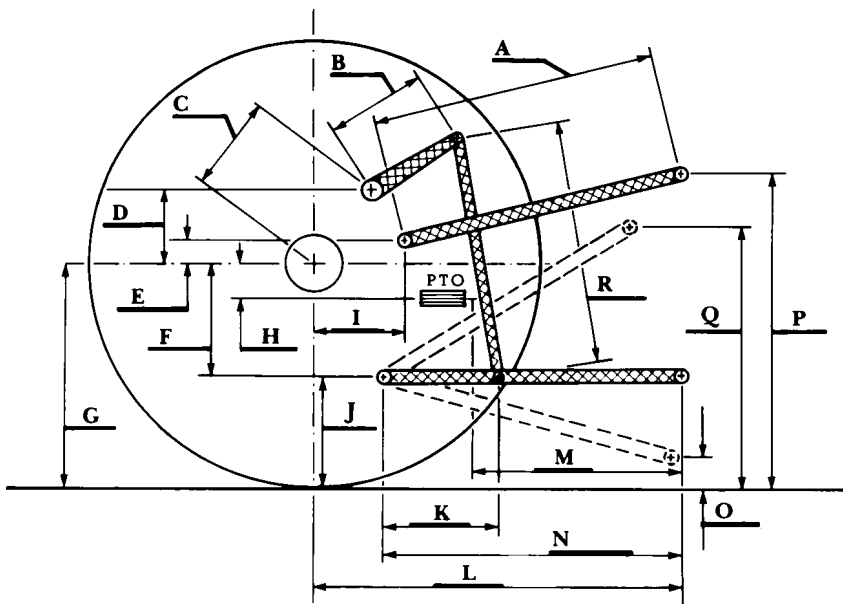

**HITCH DIMENSIONS AS TESTED—NO LOAD**

	inch	mm
A	29.1	740
B	14.0	355
C	13.8	351
D	11.6	295
E	5.5	140
F	9.8	250
G	32.2	820
H	2.8	70
I	17.5	445
J	22.4	570
K	26.2	665
L	45.1	1145
M	26.0	660
N	40.6	1030
O	7.9	200
P	46.5	1180
Q	36.2	920
R	29.3	745