

# NEBRASKA OECD TRACTOR TEST 2053-SUMMARY 866

## NEW HOLLAND TS6.110 DIESEL

### 8 SPEED

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed—(PTO speed—1074 rpm)</b>					
92.05 (68.64)	2200	6.49 (24.58)	0.494 (0.301)	14.18 (2.79)	
<b>Standard Power Take-off Speed (1000 rpm)</b>					
94.07 (70.15)	2049	6.32 (23.91)	0.471 (0.286)	14.89 (2.93)	
<b>Maximum Power (1 hour)</b>					
94.17 (70.22)	1801	5.93 (22.45)	0.441 (0.268)	15.88 (3.13)	

#### VARYING POWER AND FUEL CONSUMPTION

92.05 (68.64)	2200	6.49 (24.58)	0.494 (0.301)	14.18 (2.79)	Air temperature
81.80 (61.00)	2293	5.99 (22.68)	0.513 (0.312)	13.66 (2.69)	73°F (23°C)
62.90 (46.90)	2353	5.18 (19.61)	0.577 (0.351)	12.14 (2.39)	Relative humidity
42.00 (31.32)	2362	4.00 (15.13)	0.667 (0.406)	10.51 (2.07)	16%
21.10 (15.73)	2368	2.83 (10.70)	0.938 (0.571)	7.47 (1.47)	Barometer
1.50 (1.12)	2401	2.01 (7.61)	9.393 (5.714)	0.75 (0.15)	28.98 Hg (98.14 kPa)

Maximum torque - 374 lb.-ft. (507 Nm) at 1051 rpm

Maximum torque rise - 70.3%

Torque rise at 1760 engine rpm - 28%

Power increase at 1800-engine rpm - 2.3%

#### DRAWBAR PERFORMANCE UNBALLASTED - FRONT DRIVE ENGAGED FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp. °F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
<b>Maximum Power—5th (H1) Gear</b>									
81.30 (60.63)	5205 (23.15)	5.86 (9.42)	2200	7.4	0.564 (0.343)	12.43 (2.45)	184 (84)	58 (14)	28.78 (97.46)
<b>75% of Pull at Maximum Power—5th (H1) Gear</b>									
66.03 (49.24)	3946 (17.55)	6.28 (10.10)	2314	5.6	0.618 (0.376)	11.34 (2.23)	184 (84)	59 (15)	28.70 (97.19)
<b>50% of Pull at Maximum Power—5th (H1) Gear</b>									
45.67 (34.05)	2622 (11.66)	6.53 (10.51)	2361	3.7	0.702 (0.427)	9.98 (1.97)	184 (84)	59 (15)	28.69 (97.16)
<b>75% of Pull at Reduced Engine Speed—6th (H2) Gear</b>									
65.93 (49.16)	3981 (17.71)	6.21 (9.99)	1485	5.5	0.464 (0.282)	15.12 (2.98)	181 (83)	58 (14)	28.69 (97.16)
<b>50% of Pull at Reduced Engine Speed—6th (H2) Gear</b>									
45.57 (33.98)	2604 (11.58)	6.57 (10.57)	1539	3.6	0.508 (0.309)	13.79 (2.72)	180 (82)	58 (14)	28.69 (97.16)

**Location of tests:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

**Dates of tests:** December 4-6, 2012

**Manufacturer:** CNH De Mexico, Queretaro Mexico

**FUEL, OIL and TIME:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15° C) 0.8417 Fuel weight 7.008 lbs/gal (0.840 kg/l) Oil SAE 15W40 API service classification CI-4 Transmission and hydraulic lubricant New Holland M2C134D fluid Front axle lubricant New Holland M2C134D fluid Total time engine was operated 13.5 hours

**ENGINE:** Make F.P.T NEF series Diesel Type four cylinder vertical with turbocharger and air to air intercooler Serial No. 990034 Crankshaft lengthwise Rated engine speed 2200 Bore and stroke 4.094" x 5.197" (104.0 mm x 132.0 mm) Compression ratio 17.5 to 1 Displacement 274 cu in (4485 ml) Starting system 12 volt Lubrication pressure Air cleaner two paper elements Oil filter one full flow cartridge Oil cooler engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil Fuel filter one paper element Muffler vertical Cooling medium temperature control one thermostat

**ENGINE OPERATING PARAMETERS:** Fuel rate: 44.1 - 46.8 lb/h (20.0 - 21.2 kg/h) High idle: 2350 - 2450 rpm Turbo boost: nominal 13.8- 16.7 psi (95 - 115 kPa) as measured 15.3 psi (105 kPa)

**CHASSIS:** Type front wheel assist Serial No. NH000453M Tread width rear 64.0" (1626 mm) to 80.0" (2032 mm) front 64.0" (1626 mm) to 80.0" (2032 mm) Wheelbase 99.2" (2522 mm) Hydraulic control system direct engine drive Transmission selective gear fixed ratio Nominal travel speeds mph (km/h) first 1.67 (2.68) second 2.56 (4.12) third 3.48 (5.60) fourth 4.83 (7.77) fifth 6.14 (9.88) sixth 9.45 (15.21) seventh 12.83 (20.65) eighth 17.82 (28.68) reverse 1.72 (2.77), 2.65 (4.26), 3.60 (5.79), 5.00 (8.04), 6.35 (10.22), 9.77 (15.73), 13.27 (21.36), 18.43 (29.66) Clutch single dry disc operated by foot pedal Brakes single wet disc operated by two foot pedals which can be locked together Steering hydrostatic Power take-off 540 rpm at 1890 engine rpm or 1000 rpm at 2049 engine rpm Unladen tractor mass 9665 lb (4384 kg)

**DRAWBAR PERFORMANCE**  
**UNBALLASTED - FRONT DRIVE ENGAGED**  
**MAXIMUM POWER IN SELECTED GEARS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)	
3rd(L3)Gear									
64.54 (48.13)	7624 (33.91)	3.18 (5.11)	2293	14.9	0.661 (0.402)	10.60 (2.09)	184 (84)	60 (16)	28.72 (97.26)
4th(L4)Gear									
78.18 (58.30)	6618 (29.44)	4.43 (7.13)	2200	10.9	0.586 (0.356)	11.97 (2.36)	184 (84)	61 (16)	28.74 (97.33)
5th(H1)Gear									
81.30 (60.63)	5205 (23.15)	5.86 (9.42)	2200	7.4	0.564 (0.343)	12.43 (2.45)	184 (84)	58 (14)	28.78 (97.46)
6th(H2)Gear									
81.65 (60.89)	3282 (14.60)	9.33 (15.02)	2200	4.3	0.559 (0.340)	12.54 (2.47)	184 (84)	60 (16)	28.77 (97.43)

**UNBALLASTED - FRONT DRIVE ENGAGED-1800 RPM**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)	
3rd(L3)Gear									
64.56 (48.14)	7632 (33.95)	3.17 (5.10)	2292	14.9	0.658 (0.400)	10.65 (2.10)	184 (84)	61 (16)	28.72 (97.26)
4th(L4)Gear									
78.32 (58.40)	6859 (30.51)	4.28 (6.89)	2150	11.9	0.581 (0.353)	12.07 (2.38)	184 (84)	61 (16)	28.74 (97.33)
5th(H1)Gear									
82.49 (61.51)	5742 (25.54)	5.39 (8.67)	2050	8.5	0.541 (0.329)	12.96 (2.55)	183 (84)	60 (15)	28.77 (97.43)
6th(H2)Gear									
84.05 (62.67)	4193 (18.65)	7.52 (12.09)	1801	5.6	0.499 (0.303)	14.05 (2.77)	182 (83)	61 (16)	28.76 (97.39)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. This tractor did not meet the manufacturer's implement flow claim of 22 GPM (83 L/min). For the maximum power tests the fuel temperature at the fuel pump return was maintained at 153°F (67°C). The performance figures on this summary were taken from a test conducted under the OECD Code II test code procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **2053**, Nebraska Summary 866, December 21, 2012.

Roger M. Hoy  
 Director

M.R. Riley  
 P.J. Jasa  
 J.D. Luck  
 Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 4th (4L) gear	79.7	79.7
Bystander in 8th (4H) gear		89.6

**TIRES AND WEIGHT**

**Rear Tires** - No., size, ply & psi (kPa)  
**Front Tires** - No., size, ply & psi (kPa)  
**Height of Drawbar**  
**Static Weight with operator** - Rear  
 - Front  
 - Total

**Tested Without Ballast**

Two 18.4-34;8;16(110)  
 Two 14.9-24;8;16(110)  
 24.0 in (610 mm)  
 5830 lb (2644 kg)  
 4010 lb (1819 kg)  
 9840 lb (4463 kg)

## HYDRAULIC PERFORMANCE


CATEGORY: II

Quick Attach: None

OECD Static test

Maximum force exerted through whole range:  
 3096 lbs (13.77 kN)  
 4608 lbs (20.50 kN)(1 external lift cylinder)  
 6174 lbs (27.46 kN)(2 external lift cylinders)

	Single pump system	Two pump system
<b>two outlet sets combined</b>		
i) Sustained pressure of the open relief valve:	2612 psi (180 bar)	2413 psi (166 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	13.3 GPM (50.4 l/min)	20.2 GPM (76.5 l/min)
iii) Pump delivery rate at maximum hydraulic power:	12.9 GPM (48.9 l/min)	17.4 GPM (65.9 l/min)
Delivery pressure:	2072 psi (143 bar)	1725 psi (119 bar)
Power:	15.6 HP (11.6 kW)	17.5 HP (13.1 kW)
<b>single outlet set</b>		
i) Sustained pressure of the open relief valve:	2616 psi (180 bar)	2431 psi (168 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	13.3 GPM (50.2 l/min)	16.4 GPM (61.9 l/min)
iii) Pump delivery rate at maximum hydraulic power:	12.4 GPM (47.1 l/min)	15.5 GPM (58.7 l/min)
Delivery pressure:	2052 psi (141 bar)	1773 psi (122 bar)
Power:	14.9 HP (11.1 kW)	16.0 HP (12.0 kW)

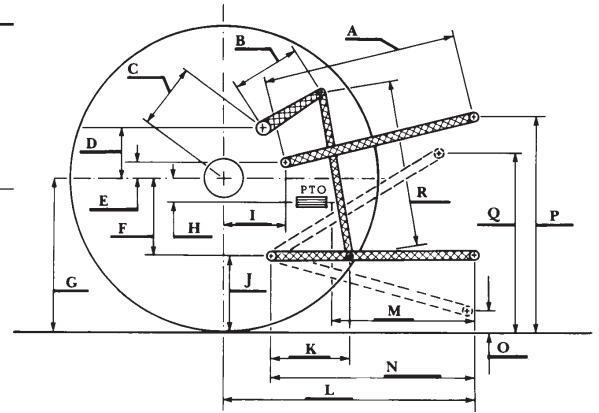

### HITCH DIMENSIONS AS TESTED—NO LOAD

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	27.7	705	28.5	724
B	9.8	250	9.8	250
C	14.1	357	14.1	357
D	13.5	342	13.5	342
E	8.1	205	8.1	205
F	9.0	229	9.0	229
G	30.3	770	30.3	770
H	0.4	10	0.4	10
I	12.7	323	12.7	323
J	21.3	541	21.3	541
K	18.1	460	18.1	460
L	40.8	1037	40.8	1037
M	22.9	581	22.9	581
N	36.6	930	36.6	930
O	8.0	203	8.0	203
P	40.3	1024	45.3	1151
Q	34.0	864	34.0	864
R	32.5	826	32.5	826

### THREE POINT HITCH PERFORMANCE(SAE Static test)

Observed maximum pressure psi. (bar)	2480 (171)				
Location:	lift cylinder				
Hydraulic oil temperature: °F (°C)	145 (63)				
Location:	pump inlet				
Category:	II				
Quick attach:	none				
System pressure 2210 psi (152 Bar)					
Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	4374	4244	4127	4257	3735
" " " " " " (kN)	(19.5)	(18.9)	(18.4)	(18.9)	(16.6)
<b>One external lift cylinder</b>					
System pressure 2210 psi (152 Bar)					
Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	6764	6444	6174	6300	5499
" " " " " " (kN)	(30.1)	(28.7)	(27.5)	(28.0)	(24.5)
<b>Two external lift cylinders</b>					
System pressure 2210 psi (152 Bar)					
Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	9270	8622	8199	8361	7326
" " " " " " (kN)	(41.2)	(38.4)	(36.5)	(37.2)	(32.6)



**NEW HOLLAND TS6.110 DIESEL**

Institute of Agriculture and Natural Resources  
 University of Nebraska-Lincoln